

## Capitolo 3 – Sviluppo di Programmi Strutturati

### Outline

**Introduzione**  
**Strutture di controllo**  
**If Selection Statement**  
**If...Else Selection Statement**  
**While Repetition Statement**  
**Ripetizione Counter-Controlled**  
**Uso di una sentinella**  
**Strutture di controllo innestate**  
**Operatori di assegnamento**  
**Operatori di Incremento e Decremento**

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



### Introduzione

- Prima di scrivere un programma:
  - Comprendere a fondo il problema
  - Pianificare con cura un approccio per risolverlo
- Mentre si scrive un programma:
  - Individuare quali “building blocks” sono disponibili
  - Usare **buoni principi di programmazione**

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



### 3 Strutture di controllo

- Teorema di Bohm e Jacopini
  - Tutti i programmi possono essere scritti usando tre strutture di controllo fondamentali
    - SEQUENZA: Nativa nel C. I programmi vengono eseguiti sequenzialmente per default
    - SELEZIONE: Il C ne ha tre tipi: `if`, `if...else`, e `switch`
    - ITERAZIONE: Il C ne ha tre tipi: `while`, `do...while` e `for`

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



### 4 If Selection Statement

- Struttura di SELEZIONE:
  - Usata per scegliere tra diverse alternative
  - Pseudocodice:  
*If student's grade is greater than or equal to 60  
Print "Passed"*
- Se la condizione è vera (`true`)
  - Statement Print eseguito e il programma va al prossimo statement
  - Se falsa (`false`), print statement ignorato e il programma va al prossimo statement
  - L'indentazione rende il programma più leggibile
    - Il C ignora gli spazi bianchi

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



## 5 | if Selection Statement

- Statement in C:

```
if ( grade >= 60 )  
    printf( "Passed\n" );
```

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



5

## 6 | if...else Selection Statement

- if

– Esegue un'azione solo se la condizione è vera (true)

- if...else

– Specifica l'azione da eseguire quando la condizione è vera (true) e quando è falsa (false)

- Pseudocodice:

```
If student's grade is greater than or equal to 60  
    Print "Passed"  
else  
    Print "Failed"
```

– Nota la spaziatura e l'indentazione

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



6

## 7 | if...else Selection Statement

- Codice C:

```
if ( grade >= 60 )  
    printf( "Passed\n" );  
else  
    printf( "Failed\n" );
```

- Operatore condizionale ternario (?:)

– Ha tre argomenti (condizione, valore se true, valore se false)

– Possiamo scrivere:

```
printf( "%s\n", grade >= 60 ? "Passed" : "Failed" );
```

– Oppure:

```
grade >= 60 ? printf( "Passed\n" ) : printf( "Failed\n" );
```

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



7

## 8 | if...else Selection Statement

- if...else statement innestati

– Test per casi multipli tramite if...else selection statements all'interno di if...else selection statement

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



8

## I f...el se Selection Statement

- Pseudocodice per i f...el se innestati

```
If student's grade is greater than or equal to 90
    Print "A"
else
    If student's grade is greater than or equal to 80
        Print "B"
    else
        If student's grade is greater than or equal to 70
            Print "C"
        else
            If student's grade is greater than or equal to 60
                Print "D"
            else
                Print "F"
```

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



9

## I f...el se Selection Statement

- Statement composti:

- Insieme di statements all'interno di coppie di parentesi graffe

- Esempio:

```
if ( grade >= 60 )
    printf( "Passed.\n" );
else {
    printf( "Failed.\n" );
    printf( "You must take this course again.\n" );
}
```

- Senza le parentesi, lo statement

```
printf( "You must take this course again.\n" );
sarebbe eseguito automaticamente
```

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



10

## whi l e Repetition Statement

- Struttura iterativa

- Il programmatore specifica un'azione che deve essere eseguita fino a quando una condizione rimane vera (true)
- Pseudocodice:

```
While there are more items on my shopping list
    Purchase next item and cross it off my list
```

- Ciclo whi l e ripetuto fino a quando la condizione diviene falsa (false)

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.




11

## whi l e Repetition Statement

- Esempio:

```
int product = 2;
while ( product <= 1000 )
    product = 2 * product;
```

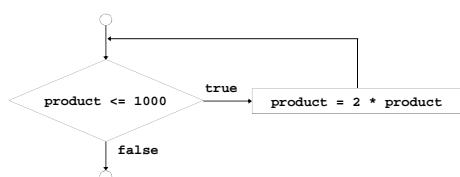

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



12

## Ripetizione Counter-Controlled

- Ripetizione Counter-controlled

- Ciclo ripetuto fino a quando un contatore raggiunge un certo valore
- Il numero di ripetizioni è noto a priori
- Esempio: 10 studenti rispondono ad un quiz. I risultati (interi tra 0 e 100) per questo quiz sono disponibili. Determinare la media della classe per quel quiz
- Pseudocodice:
 

```

Set total to zero
Set grade counter to one
While grade counter is less than or equal to ten
  Input the next grade
  Add the grade into the total
  Add one to the grade counter
Set the class average to the total divided by ten
Print the class average
      
```

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



13

```

/* Fig. 3.6: fig03_06.c
   Class average program w/ th counter-controlled repetition */
#include <stdio.h>
/* function main begins program execution */
int main()
{
    int counter; /* number of grade to be entered next */
    int grade; /* grade value */
    int total; /* sum of grades input by user */
    int average; /* average of grades */

    /* initialization phase */
    total = 0; /* initialize total */
    counter = 1; /* initialize loop counter */

    /* processing phase */
    while ( counter <= 10 ) { /* loop 10 times */
        printf("Enter grade: ");
        scanf("%d", &grade); /* read grade from user */
        total = total + grade; /* add grade to total */
        counter = counter + 1; /* increment counter */
    } /* end while */
}
  
```

Outline  
fig03\_06.c (Part 1 of 2)

14

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



```

/* termination phase */
average = total / 10; /* integer division */
/* display result */
printf( "Class average is %d\n", average );
return 0; /* indicate program ended successfully */
} /* end function main */
  
```

Enter grade: 98
Enter grade: 76
Enter grade: 71
Enter grade: 87
Enter grade: 83
Enter grade: 90
Enter grade: 57
Enter grade: 79
Enter grade: 82
Enter grade: 94
Class average is 81

Outline

fig03\_06.c (Part 2 of 2)

Program Output

15

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

## Uso di una sentinella

- Il problema diviene:

*Sviluppare un programma per calcolare la media della classe su un numero qualsiasi di studenti.*

- Numero di studenti non conosciuto a priori
- Come fa il programma a sapere quando deve terminare?

- Usare un valore *sentinella*

- Indica "la fine dell'inserimento dei dati"
- Il ciclo termina quando l'utente inserisce il valore sentinella
- Il valore sentinella viene scelto in modo che non possa essere confuso con un input regolare (ad esempio -1 in questo esempio)

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



## Uso di una sentinella

Initialize total to zero  
Initialize counter to zero

Input the first grade  
While the user has not as yet entered the sentinel  
    Add this grade into the running total  
    Add one to the grade counter  
    Input the next grade (possibly the sentinel)

If the counter is not equal to zero  
    Set the average to the total divided by the counter  
    Print the average  
else  
    Print "No grades were entered"

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



17

```
/* Fig. 3.8: fig03_08.c
   Class average program wth sentinel -controlled repetition */
#include <stdio.h>
/* function main begins program execution */
int main()
{
    int counter; /* number of grades entered */
    int grade; /* grade value */
    int total; /* sum of grades */
    float average; /* number with decimal point for average */

    /* Initialization phase */
    total = 0; /* Initialize total */
    counter = 0; /* Initialize loop counter */

    /* processing phase */
    printf("Enter grade, -1 to end: "); /* prompt for input */
    scanf("%d", &grade); /* read grade from user */

    /* loop while sentinel value not yet read from user */
    while (grade != -1) {
        total = total + grade; /* add grade to total */
        counter = counter + 1; /* Increment counter */
        grade = -1;
    }
}
```

Outline  
fig03\_08.c (Part 1 of 2)

18

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

```
28 printf("Enter grade, -1 to end: "); /* prompt for input */
29 scanf("%d", &grade); /* read next grade */
30 /* end while */
31
32 /* termination phase */
33 /* if user entered at least one grade */
34 if (counter != 0) {
35
36     /* calculate average of all grades entered */
37     average = (float) total / counter;
38
39     /* display average with two digits of precision */
40     printf("Class average is %.2f\n", average);
41 } /* end if */
42 else /* if no grades were entered, output message */
43     printf("No grades were entered\n");
44 /* end else */
45
46 return 0; /* Indicate program ended successfully */
47
48 */ end function main */

```

Outline  
fig03\_08.c (Part 2 of 2)

19

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

```
Enter grade, -1 to end: 75
Enter grade, -1 to end: 94
Enter grade, -1 to end: 97
Enter grade, -1 to end: 98
Enter grade, -1 to end: 70
Enter grade, -1 to end: 64
Enter grade, -1 to end: 83
Enter grade, -1 to end: 89
Enter grade, -1 to end: -1
Class average is 82.50
```

Outline  
Program Output

20

```
Enter grade, -1 to end: -1
No grades were entered
```

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

## Strutture di controllo innestate

- Problema
  - Un college ha una lista di risultati di test (1 = superato, 2 = fallito) per 10 studenti
  - Scrivere un programma che analizzi i risultati
    - Se più di 8 studenti superano il test, allora stampa "Insegnamento OK"
- Nota
  - Il programma deve processare 10 risultati del test
    - Sarà usato un ciclo counter-controlled
  - Possono essere usati due contatori
    - Uno per il numero di "superato", uno per il numero di "fallito"
  - Ogni risultato del test result è un numero —1 oppure 2
    - Se il numero non è 1, assumiamo sia 2

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



21

## Strutture di controllo innestate

- Top level outline
  - Analyze exam results and decide if tuition should be raised*
- First Refinement
  - Initialize variables*
  - Input the ten quiz grades and count passes and failures*
  - Print a summary of the exam results and decide if tuition should be raised*
- Refine *Initialize variables* to
  - Initialize passes to zero*
  - Initialize failures to zero*
  - Initialize student counter to one*

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



22

## Strutture di controllo innestate

- Refine *Input the ten quiz grades and count passes and failures* to
  - While student counter is less than or equal to ten*
  - Input the next exam result*
  - If the student passed*
  - Add one to passes*
  - else*
  - Add one to failures*
  - Add one to student counter*
- Refine *Print a summary of the exam results and decide if tuition should be raised* to
  - Print the number of passes*
  - Print the number of failures*
  - If more than eight students passed*
  - Print "Raise tuition"*

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



23

## Strutture di controllo innestate

*Initialize passes to zero*  
*Initialize failures to zero*  
*Initialize student to one*

*While student counter is less than or equal to ten*  
*Input the next exam result*

*If the student passed*  
    *Add one to passes*

*else*  
    *Add one to failures*

*Add one to student counter*

*Print the number of passes*  
*Print the number of failures*  
*If more than eight students passed*  
    *Print "Raise tuition"*

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



24

```

1 /* Fig. 3-10: fig03_10.c
2  Analysis of examination results */
3 #include <stdio.h>
4
5 /* function main begins program execution */
6 int main()
7 {
8     /* Initialize variables in definitions */
9     int passes = 0; /* number of passes */
10    int failures = 0; /* number of failures */
11    int student = 1; /* student counter */
12    int result; /* one exam result */
13
14    /* process 10 students using counter-controlled loop */
15    while (student <= 10) {
16
17        /* prompt user for input and obtain value from user */
18        printf("Enter result (1=pass, 2=fail): ");
19        scanf("%d", &result);
20
21        /* if result 1, increment passes */
22        if (result == 1) {
23            passes++;
24        } /* end if */
25

```

 **Outline**  
 fig03\_10.c (Part 1 of 2)

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

```

25     else { /* otherwise, increment failures */
26         failures++;
27     } /* end else */
28
29     student++; /* increment student counter */
30 } /* end while */
31
32 /* termination phase; display number of passes and failures */
33 printf("Passed %d\n", passes);
34 printf("Failed %d\n", failures);
35
36 /* If more than eight students passed, print "raise tuition" */
37 if (passes > 8) {
38     printf("Raise tuition\n");
39 } /* end if */
40
41 return 0; /* indicate program ended successfully */
42
43 } /* end function main */

```

 **Outline**  
 fig03\_10.c (Part 2 of 2)

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

```

Enter Result t (1=pass, 2=fail): 1
Enter Result t (1=pass, 2=fail): 2
Enter Result t (1=pass, 2=fail): 2
Enter Result t (1=pass, 2=fail): 1
Enter Result t (1=pass, 2=fail): 2
Enter Result t (1=pass, 2=fail): 1
Passed 6
Failed 4

Enter Result t (1=pass, 2=fail): 1
Enter Result t (1=pass, 2=fail): 1
Enter Result t (1=pass, 2=fail): 1
Enter Result t (1=pass, 2=fail): 2
Enter Result t (1=pass, 2=fail): 1
Passed 9
Failed 1
Raise tuition

```

 **Outline**  
 Program Output

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

## 28 Operatori di assegnamento

- Gli operatori di assegnamento abbreviano le espressioni di assegnamento

$c = c + 3;$

può essere abbreviato in  $c += 3$

- Statement nella forma

$variable = variable\ operator\ expression;$

possono essere riscritti nella forma

$variable\ operator=\ expression;$

- Esempi di altri operatori di assegnamento:

$d -= 4 \quad (d = d - 4)$

$e *= 5 \quad (e = e * 5)$

$f /= 3 \quad (f = f / 3)$

$g %= 9 \quad (g = g \% 9)$

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

## Operatori di assegnamento

Siano: int c = 3, d = 5, e = 4, f = 6, g = 12;			
Operatore di assegnamento	Esempio di espressione	Spiegazione	Assegna
<code>+=</code>	<code>c += 7</code>	<code>c = c + 7</code>	10 a c
<code>-=</code>	<code>d -= 4</code>	<code>d = d - 4</code>	1 a d
<code>*=</code>	<code>e *= 5</code>	<code>e = e * 5</code>	20 a e
<code>/=</code>	<code>f /= 3</code>	<code>f = f / 3</code>	2 a f
<code>%=</code>	<code>g %= 9</code>	<code>g = g % 9</code>	3 a g

Fig. 3.11 Operatori aritmetici di assegnamento.

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



29

## Operatori di Incremento e Decremento

- Operatore di Incremento (++)

- Può essere usato invece di `c+=1`

- Operatore di Decremento (--)

- Può essere usato invece di `c-=1`

- Preincremento

- L'operatore è usato prima della variabile (`++c` or `--c`)

- La variabile è cambiata prima che l'espressione che la contiene sia valutata

- Postincremento

- L'operatore è usato dopo la variabile (`c++` or `c--`)

- L'espressione viene eseguita prima che la variabile sia cambiata

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



30

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.

## Operatori di Incremento e Decremento

- Se `c` è uguale a 5, allora
  - Stampa 6
 

```
printf( "%d", ++c );
```
  - Stampa 5
 

```
printf( "%d", c++ );
```
  - In entrambi i casi, `c` ha il valore 6
- Quando la variabile non è in un'espressione
  - Preincremento e postincremento hanno lo stesso effetto
 

```
++c;
printf( "%d", c );
```
  - Ha lo stesso effetto di
 

```
c++;
printf( "%d", c );
```

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



31

```

/*
 * Fig. 3.13: Fig03_13.c
 * Preincrementing and postincrementing
 */
#include <stdio.h>
// function main begins program execution
Int main()
{
    Int c;           /* define variable */

    /* demonstrate postincrement */
    c = 5;           /* assign 5 to c */
    printf( "%d\n", c ); /* print 5 */
    printf( "%d\n", c++ ); /* print 5 then postincrement */
    printf( "%d\n", c ); /* print 6 */

    /* demonstrate preincrement */
    c = 5;           /* assign 5 to c */
    printf( "%d\n", c ); /* print 5 */
    printf( "%d\n", ++c ); /* preincrement then print 6 */
    printf( "%d\n", c ); /* print 6 */
}

return 0; /* Indicate program ended successfully */
}

```

© Copyright 1992-2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.



32

fig03\_13.c

5  
5  
6  
5  
6  
6



33

Program Output

© Copyright 1992–2004 by Deitel & Associates, Inc. and Pearson Education Inc. All Rights Reserved.